

Quotation Worksheet - Filter Elements

Print, Fill Out, & FAX Back

Form is also at www.sparksfilters.com **Request A Quote**


Sparks filter elements are offered in styles and sizes that directly replace OEM elements. We cross reference thousands of filters to assist you in sourcing your replacement needs, while saving you money.

Can you email a digital picture.jpg to: Sales@SparksFilters.com?
 Can you measure the element's ID, OD, OH? If so we can replace it.
 If you only answer the items in red, we can get started.

Your Name _____
 Company _____
 Address _____
 City, State, Zip _____
 Phone _____ Fax _____
 email _____

Is your element a

Sewn End Style ?

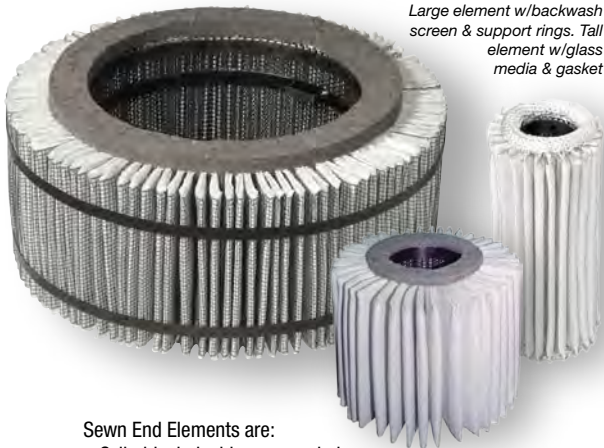


Sewn End Elements are:

- Cylindrical, double open ended.
- Typically four overall heights: 12", 17", 21", or 25".
- Carbon steel (magnetic) or 304SS core. (not magnetic)
- Felt or rope style gasket, die cut or formed.

What end type Is It? (Pick One):

Sewn End _____ Molded End _____ Accordion _____

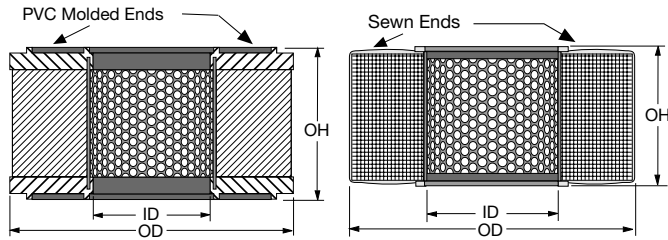

(Measure ID, OD & OH to closest 1/8 inch)

Inside Diam. of core, or inner support rings.	Outside Diam. ...if it's out of round, measure circumference & divide by 3.14	Overall Height ...set a yardstick across top & measure from underside of the stick to the table or floor.	# of Pleats ±2 ...count a 90° section & multiply by 4.

Are you replacing an existing filter element? _____(Y/N)

Is there a brand name on a tag ? _____

Can you find any part numbers ? _____

Is your element open at both ends? _____(Y/N)

Choose metal parts i.e. center core, rings, wire screens

Coated mild steel [] 304 SS [] . . . or 316 SS []

...carbon steel is magnetic, 304SS and 316SS are not magnetic.

... Or a

Molded End Style ?



Molded End Elements are:

- Cylindrical, double or single open ended.
- Any overall heights.
- Carbon steel (magnetic) or 304SS core (not magnetic)
- Ends are:
 - 1.) Rubber (excellent) or PVC (cheap seats use this)
 - 2.) Silicone (typically red) service to 500°F.

... Or an

Accordion Style ?



Accordion Style Elements are:

- cylindrical, double open ended.
 - Polyester felt filter media.
 - No center core.
- We need only the OH, Fin Depth, and No. of pleats to quote you. There is no "ID"

Filter media (See choices on pg 30) _____

.....#5 (10µ polyester felt) is the most common choice, #7 or #910 close 2nds.

You can mail us a scrap of the existing media if you like.

Do you want a pleated backwash screen ? _____ (Y/N)

... option for Sewn Ends, molded ends include this (unless they are cheap paper)

Do you need internal metal fin spacers ? _____ (Y/N)

... option for Sewn Ends used in liquid service. Quality fin spacers are corrugated.

Operating Temperature? _____ ° F

What fluid are you filtering? _____

...i.e. room air, natural gas, compressor exhaust with oil mist ??

If Molded End Style:

Std. Rubber _____ (Pick one Y/N)

...continuous service to 250°F, intermittently to 350°F, consult us for considerations at elevated temperatures.

OR Aliphatic Hydrocarbon Resistant PVC _____

...continuous service to 200°F, intermittently to 250°F


OR RTV Silicone _____

...continuous serve to 450°F, intermittently to 500°F

Other (Metal perhaps, but is that important?) _____

Other comments _____


For more information contact :
SparksFilters 585-624-4500
585-624-5300 fax
E-Mail: Sales@sparksfilters.com

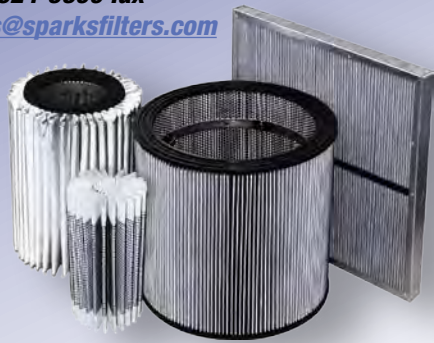

From left to right above, **SEWN END**, **ACCORDION**, **RUBBER MOLDED END**, and **PANEL** filter elements.

Each style can be supplied with different filter media, and other variations. Our filter elements surpass the most stringent requirements for long life, low ΔP , positive seals, and maximum air flow in compact and cleanable units. Our molded end filter elements do not require a bothersome expanded metal outer wrap to prevent the handling damage common to lesser paper filter media. Instead, we pleat textile filter media between layers of epoxy coated wire screen to yield a rugged jacketed media with 1/4th the resistance to flow of paper media. Jacketed fins resist collapse, have exceptionally high flow, long life (a year is common), and are unharmed by moisture, vibration, pulse flow, and most other service hazards. This also simplifies cleaning with air guns or spray cleaning units. Element cores are 58% open perforated steel. These cores retain column strength where lesser expanded metal, or woven wire cores fail. **Our molded urethane rubber ends out perform lesser molded PVC ends offered by many competitors.** See <http://www.sparksfilters.com> for more options.

Filter media: (see table) #5 polyester felt is arguably the most rugged, washable, 10 μ media ever offered. Our #7 polyester medium stops 4 μ particles. Elements with 2 μ #51 fiberglass are rugged, but not washable. Our 0.1 μ HEPA grade #904 medium can stop bacteria. Our #916 medium has 50% activated carbon and can strip away undesirable vapors. Our #910 medium outshines other low cost alternatives at stopping the airborne lint and dirt prevalent

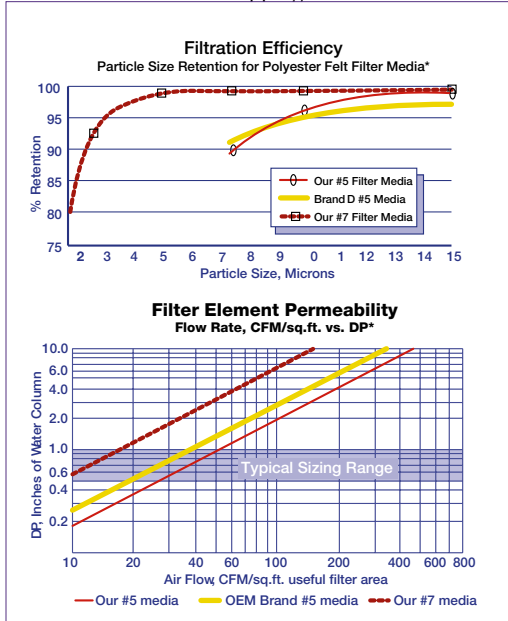


in ambient air sources today. Newest of all, our #907 medium with reverse flow radial fin design effectively coalesces smoke and mists without high ΔP loss!


Optional Filter Media

Media Suffix #	Filter Media Description:	Reten.* μ Liq	Reten.* μ Gas	Temp. °F	Style* used in:
1.....	Woven Cotton.....	30.....	≤ 30.....	200.....	S, M
2.....	Rayon Felt.....	> 10.....	200.....	S, M
3.....	Woven Cotton.....	5.....	2.....	200.....	S, M
5.....	Polyester Felt.....	20.....	10.....	300.....	S, M
7.....	Polyester Felt.....	5.....	4.....	300.....	S, M
8.....	Woven Fiberglass.....	15.....	10.....	700.....	S, M
12.....	Cotton Terrycloth.....	20.....	≤ 20.....	200.....	S, M
26.....	304 SS, 100 mesh.....	150.....	150.....	1000.....	M
30.....	304 SS, 200 mesh.....	75.....	75.....	1000.....	M
42.....	Woven Cotton.....	1.....	Not Rated.....	200.....	S, M
47.....	304 SS, 325 mesh.....	40.....	40.....	1000.....	M
51.....	Fiberglass Felt, Yellow.....	> 1.....	1.....	450.....	M
59.....	Woven Nylon.....	5.....	≤ 5.....	250.....	S, M
60.....	Woven Nylon.....	45.....	≤ 45.....	250.....	S, M
61.....	304SS, 200 x 1400 mesh.....	15.....	15.....	1000.....	M
62.....	304SS, 325 x 2300 mesh.....	10.....	10.....	1000.....	M
63.....	Fiberglass Locked/Felt.....	> 1.5.....	1.5.....	500.....	S, M
64.....	Polyester Felt.....	5.....	4.....	300.....	S, M
65.....	Woven Nylon.....	90.....	≤ 90.....	250.....	S, M
66.....	Woven Polyester.....	2.....	Not Rated.....	300.....	S, M
69.....	Dynel, woven.....	2.....	Not Rated.....	200.....	S, M
72.....	Polyester Felt.....	2.....	2.....	300.....	S, M
85.....	Woven Teflon®.....	10.....	≤ 10.....	450.....	S, M
86.....	Teflon Felt.....	10.....	5.....	450.....	S, M
90.....	Polyester Felt.....	Not Rated.....	Not Rated.....	300.....	M
99.....	Polyester Felt - Now a misnomer. Depending upon OEM brand, is either #5 or #7 media. Order #7 media if du is needed.				
100.....	Woven Polypropylene.....	15.....	10.....	175.....	S, M
101.....	Woven Polypropylene.....	10.....	5.....	175.....	S, M
102.....	Woven Polypropylene.....	5.....	3.....	175.....	S, M
103.....	Woven Polypropylene.....	1.....	1.....	175.....	S, M
105.....	Fiberglass Felt, Pink.....	> 2.....	2.....	450.....	M
108.....	Fiberglass Felt, Pink.....	> 0.3.....	0.3.....	450.....	M
111.....	304SS, 50 mesh.....	280.....	280.....	1000.....	M
135.....	Woven Fiberglass.....	6.....	3.....	700.....	S, M
139.....	Nomex Felt.....	10.....	5.....	450.....	S, M
142.....	Polypropylene Felt.....	10.....	5.....	175.....	S, M
169.....	Polyester Felt.....	20.....	10.....	300.....	S, M
200.....	Galv. C.S. mesh.....	750.....	750.....	500.....	M
212.....	Rayon/Nylon Felt.....	50.....	50.....	200.....	S, M
214.....	Rayon/Nylon Felt.....	100.....	100.....	200.....	S, M
418.....	Woven Polyester.....	75.....	75.....	300.....	S, M
703.....	Woven Virgin Teflon®.....	10.....	10.....	450.....	S, M
704.....	Woven Polyester.....	10.....	8.....	300.....	S, M
900.....	Paper / Microglass.....	0.5.....	0.3 abs.....	180.....	M
904.....	Microglass.....	0.5.....	0.1.....	400.....	M
906.....	Microglass combination.....	> 1.....	1.....	200.....	M
907.....	Microglass combination.....	> 0.3.....	≤ 0.3.....	200.....	M
910.....	Polyester/Cotton Felt.....	> 40.....	40.....	300.....	M
916.....	Activ. Carbon/Glass.....	Not Rated.....	Not Rated.....	200.....	M
920.....	Treated Microglass.....	Not Rated.....	1.5.....	400.....	M
921.....	Poly/Glass.....	Not Rated.....	0.1.....	200.....	M
923.....	Polypropylene.....	Not Rated.....	25.....	175.....	M
924.....	Poly/Glass.....	Not Rated.....	< 0.3.....	200.....	M
926.....	Poly/Glass.....	Not Rated.....	< 0.3.....	200.....	M
927.....	Poly/Glass.....	Not Rated.....	< 0.3.....	200.....	M
928.....	304SS mesh, 50 x 200.....	Not Rated.....	60.....	700.....	M
931.....	PTFE Finished Microglass.....	Not Rated.....	4.....	500.....	S, M
932.....	Polyester Felt.....	40.....	25.....	300.....	S, M
..... Call Us For Many Additional Special Purpose Filter Medium.....					
..... * S = Sewn End, M = Molded End.....					

Typical Cellulosic (paper) Media

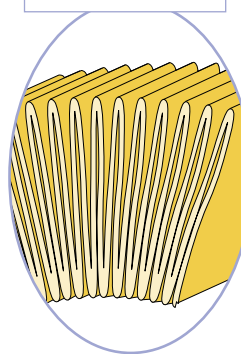

Fin Design of Textile Media (Upstream screen layer omitted in illustration)

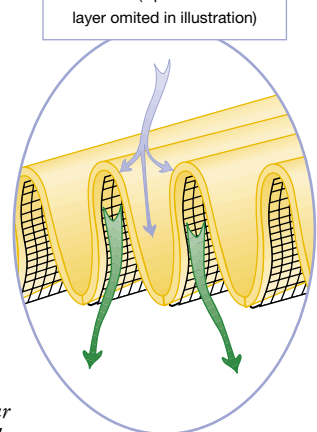

Breathing Room...

Do you really care if dirt gets past your filter? Is it worth trying to save a buck on paper rather than rugged textile media? Oddly enough, paper elements cost much more in the long run. Paper pleats crack where you can't see. The light bulb trick won't reveal the failure(s) either. Moisture can ruin paper. And, be very careful of vibration or handling damage. Elements with high performance textile media benefit from 1/3rd the resistance to flow of paper media. They allow open pleat spacing, higher dirt holding capacity, are practical to clean, have lower ΔP , and longer life. Rugged polyester felt media won't crack, tolerates being soaking wet, and takes a beating. Protect your equipment, use textile media.