


Lock Plugs and Caps – High Security



93280451

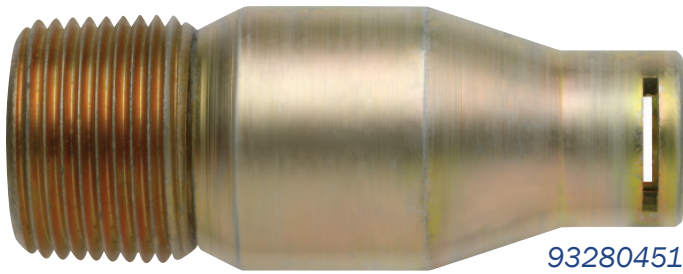

Typical Lock Plug Installation

Description

Highfield's High Security Lock Plugs and Caps will safely and securely solve open ended piping problems. Our high security plugs and caps are economical, easily installed and available with a wide range of barrel locks including the patented Beta and Revpro® systems. Available in standard pipe sizes from ½" to 2" NPT male or female thread.

Construction

Fabricated entirely of case hardened steel and corrosion resistant plating for long field life. The O-ring seal, mounted on the plug or cap, protects against adhesive fouling. Optional sealing slots permit installation of lead wire or padlock seals for further tamper protection.

Installation

1. Thread the plug or cap onto the open pipe end and tighten by applying a wrench to the flats.
2. Push shroud snugly over the O-ring seal.
3. Insert barrel lock fully and withdraw key.
4. When locked, shroud rotates freely, eliminating unauthorized removal.
5. Apply optional seal if desired.

Part Numbers	High Security Lock Plugs
93280450	½" N.P.T. Lock Plug (select desired barrel lock)
93280451	¾" N.P.T. Lock Plug (select desired barrel lock)
93280452	1" N.P.T. Lock Plug (select desired barrel lock)
93280453	1¼" N.P.T. Lock Plug (select desired barrel lock)
93280454	1½" N.P.T. Lock Plug (select desired barrel lock)
93280455	2" N.P.T. Lock Plug (select desired barrel lock)

Part Numbers	High Security Lock Caps
93280410	½" High Security Lock Cap
93280411	¾" High Security Lock Cap
93280412	1" High Security Lock Cap
93280413	1¼" High Security Lock Cap
93280414	1½" High Security Lock Cap
93280415	2" High Security Lock Cap