

END SEALS

Full Conical Shaped




APS manufactures full conical shaped end seals made of 1/8" thick synthetic rubber, assuring excellent chemical resistance and resiliency. End seals by APS can accommodate any combination of pipe sizes. These products outperform the costly and labor intensive brick and mortar method of sealing casing ends. While soil stress and pipe movement cause mortar to crack, the APS end seals move with the pipe, insuring the integrity of your seal.



AC PULL ON SEAL

Installed at the time of construction
Produced as concentric & eccentric

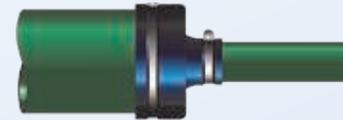


AM MOLDED END SEAL

Installed at the time
of construction



APC CLUSTER

Available for multicarrier
installations

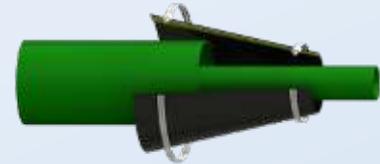


AW WRAP-AROUND SEAL

Installed when carrier line is already
installed & pull is complete.
Produced as concentric & eccentric



AMCE MOLDED CONE END SEAL

5 different sizes, 4.50"-24.00" OD,
covers a range of carriers, closed
cone feature - cut off end or use as a
cap to keep debris or animals out

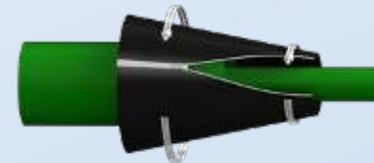

AZ ZIPPER END SEAL

New construction & on existing casings
that require modifications or extension.
Produced as concentric & eccentric

All APS End Seals are secured with stainless steel banding straps with a 100% non-magnetic worm gear mechanism to ensure the integrity of the clamp. Only a screwdriver is needed for installation.



**FOR MORE INFORMATION
PLEASE CONTACT US
1-800-315-6009**








WWW.APSONLINE.COM

SALES@APSONLINE.COM

AMCE MOLDED CONE ORDERING INFORMATION

Each AMCE End Seal can accommodate installation on two different casing sizes. See chart below for actual sizes.

IPS/DIPS (in)	DN (mm)
0.84	20
1.32	35
1.90	50
2.38	60
2.75	70
2.88	75
3.50	90
3.96	100
4.00	100
4.50	110
4.80	120
5.56	140
6.63	170
7.10	180
8.63	220
9.05	230
10.75	275
11.10	280
12.75	325
13.20	335
14.00	355
15.30	390
17.40	440

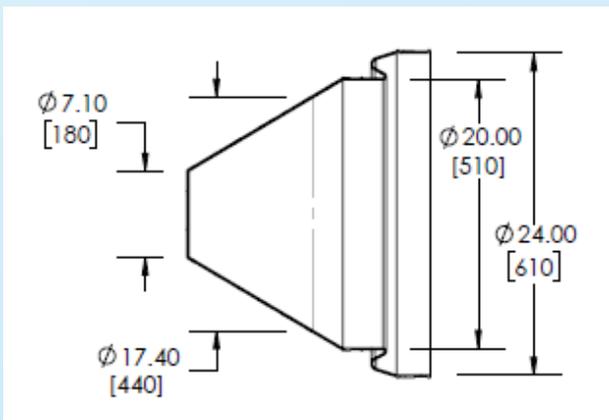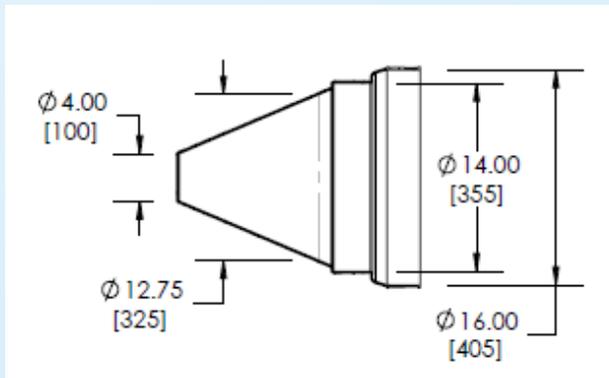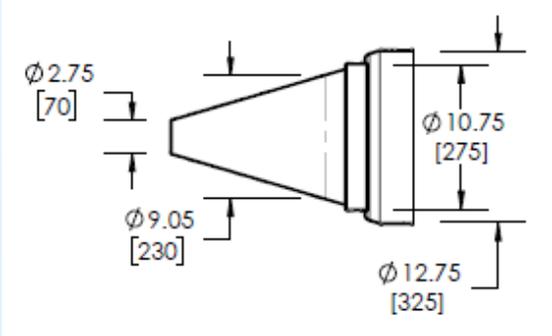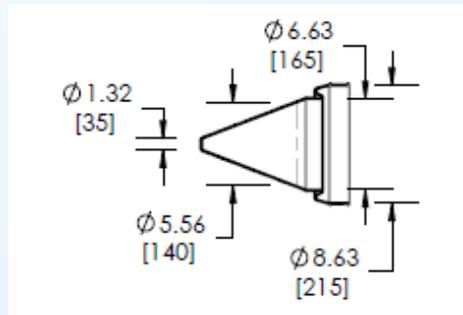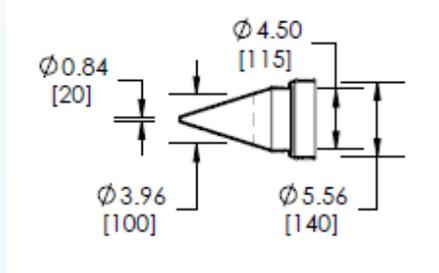

AMCE Specifications

- Material: EPDM (60 Durometer)
- Thickness: 1/8"
- Hardware: Stainless steel band with 100% non-magnetic worm gear screw
- Temp Limits: -20° to 212°F
- Color: Black
- Tensile Strength: 1,000 psi
- Elongation: 350%