


# SKINNER PIPELINE CLAMP

## MODEL "PL"

BODY DUCTILE IRON CASTINGS ASTM 395-80 536-94  
 GASKET BUNA N MATERIAL NBR ASTM D 2000  
 DUROMETER 50 +/-5  
 -40 DEGREES F-250 DEGREES F TEMPERATURE RANGE  
 HARDWARE SAE GRADE 5, ZINC PLATED C-1541 STEEL  
 E COATING JDM F11T3 18 MILL THICKNESS

**NOTE: Viton Gasket available upon request for high temperature applications.**

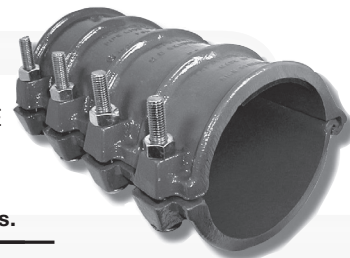

PIPELINE CLAMPS			BOLTS ONLY	
Size (inches)	Part Number	Approx. Weight (lbs.)	Size (inches)	Part Number
3/4	089875	3.75	5/16 x 2	080098
1 1/4	089873	4.75	3/8 x 2 1/2	080100
1 1/2	089872	6.5	3/8 x 2 1/2	080100
2	089871	9	7/16 x 3 1/2	080102
3	089869	15	1/2 x 3 1/2	080103
4	089868	17.5	1/2 x 3 1/2	080103
6	089866	31.5	5/8 x 5	080864

## Specifications

Size Pipe, IPS (inches)	3/4	1	1 1/4	1 1/2	2	3	4	6
Length "A" (inches)	7 1/2	8	8 1/2	9	10	11	12	14
Width "B" (inches)	2 1/8	2 1/2	2 3/4	3	3 5/8	5 1/4	6 1/4	8 1/2
Bolt Diameter "C" (inches)	5/16	3/8	3/8	3/8	7/16	1/2	1/2	5/8
Bolt Length "D" (inches)	2	2 1/2	2 1/2	2 1/2	2 3/4	3 1/2	3 1/2	5
Number of Bolts	4	4	4	4	4	4	4	4

Size (inches)	Torque	Working Pressure	Size (inches)	Torque	Working Pressure
3/4	10 ft. lbs.	600 psi	2	25 ft. lbs.	500 psi
1	15 ft. lbs.	500 psi	3	40 ft. lbs.	400 psi
1 1/4	18 ft. lbs.	500 psi	4	40 ft. lbs.	300 psi
1 1/2	18 ft. lbs.	500 psi	6	60 ft. lbs.	300 psi